

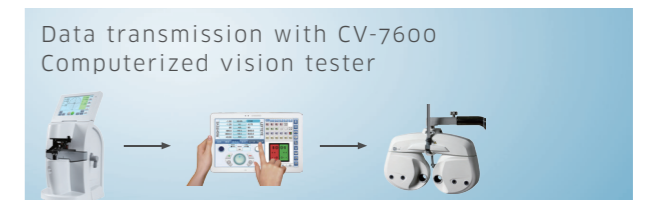
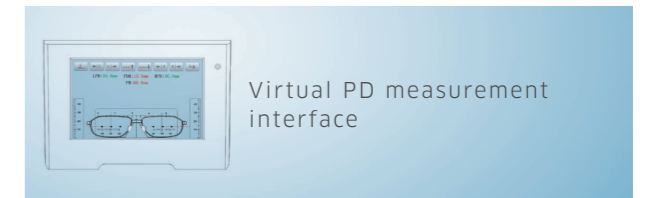
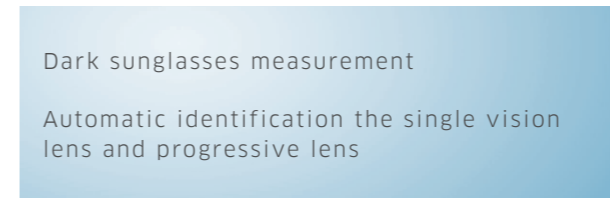


TL-6500B Auto Lensmeter

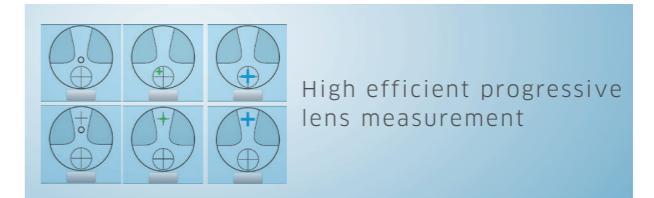

Green measurement light
Hartmann sensor
7.0 inch touch screen

Features

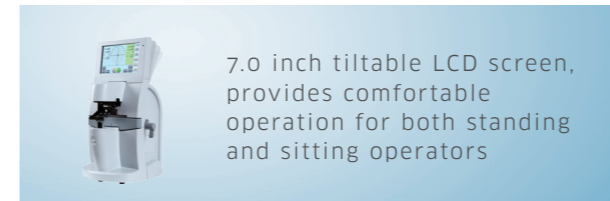

| TL-6500B Specifications | | |
|-------------------------|------------------------------|--|
| Measurement range | Sphere | -25.00 to +25.00 D (Step: 0.01 / 0.06 / 0.12 / 0.25 D) |
| | Cylinder | 0 to ±10.00 D (Step: 0.01 / 0.06 / 0.12 / 0.25 D) |
| | Axis | 0 to 180° (Step: 1°) |
| | ADD | 0 to +10.00 D (Step: 0.01 / 0.06 / 0.12 / 0.25 D) |
| | Prism | 0 to 20 Δ (0.01 / 0.06 / 0.12 / 0.25 Δ) |
| Measurement mode | Measurable lens diameter | φ 10 to 90 mm |
| | Cylinder | -, MIX, + |
| PD measurement | Prism | X-Y, P-R |
| | Wavelength / Measuring point | 20.0 to 45.0mm (monocular), Single vision PD, Progressive lens far vision PD |
| Display | Wavelength / Measuring point | 535 nm (green) / 108 within nosepiece |
| Marking system | Display | 7.0 inch color LCD |
| Printer | Marking system | Ink cartridge type |
| Interface | Printer | Build-in thermal printer (Optional) |
| Dimensions | Interface | RS232/ Bluetooth |
| Weight | Dimensions | 255 (W) x 224 (D) x 434 (H) mm |
| Power Supply | Weight | 5.0kg |
| Power consumption: | Power Supply | AC 100 to 240 V, 50 / 60 Hz |
| | Power consumption: | 35w maxium |